

Easy-Lock™ STANDING SEAM



FEATURES & BENEFITS

- 12" coverage panels
 - Vertical interlocking application
 - Patented no-siphon lock seam
 - 1 1/8" vertical rib
 - Concealed fasteners
 - Pre-slotted fastener flange: prevents leakage and allows for expansion/contraction of panel
 - Minimum slope 3:12
- * inquire with TMP on project less than 3:12
- UL 580 Class 90 Wind Uplift
 - Custom cut to length: 2'0" to 50'0"
 - "Flat pan" option available on request


MATERIAL SPECIFICATIONS

- 26 gauge Kynar 500® Painted Steel
.0187" Steel (thickness prior to painting)
Per ASTM A-653-94
Grade A
G-90 Galvanizing
- 24 gauge Kynar 500® Painted Steel
.0236" (thickness prior to painting)
Per ASTM A-653-94
G-90 Galvanizing
- 24 gauge Galvalume/Zincalume
.0236" Steel
AZ55 - Clear Acrylic Coating
Per ASTM A-792
- 16 ounce Copper
Per ASTM B-370

FINISHES


- 20 Standard Cool Kynar 500® Colors
- 5 Metallic Cool Kynar 500® Colors
- Kynar 500® Paint System – the ultimate in exterior durability and color retention
- Kynar 500®, two-coat, 70% resin finish, applied to a 1 mil. thickness
- 30-year paint warranty includes:
 - fading
 - chalking
 - chipping
 - cracking
 - peeling

PANEL PROFILE

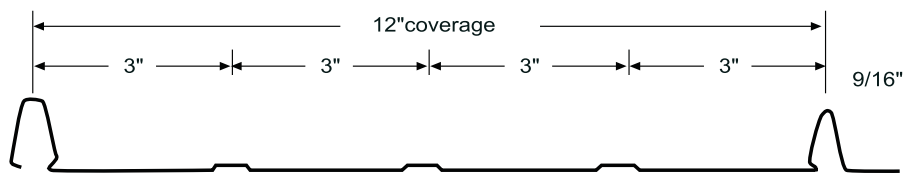

LOCK SEAM DETAIL

U.S. Patent #4,878,331

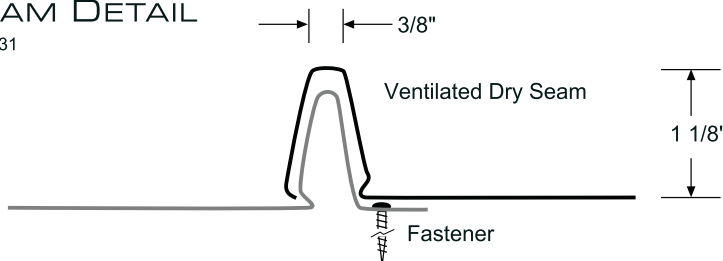

TAYLOR
METAL PRODUCTS

4566 Ridge DR NE Salem OR 97301
503-581-8338 or 1-800-574-1388
taylormetal.com